


CampbellCrimpnology™ offers crimping flexibility for your multi-purpose hose applications.



COMBINATION NIPPLES AND MENDERS

Features & Benefits

- Maximum number of serrations for maximum holding power.
- Long lead serration for easier hose insertion.
- Formed hex wrench area on 3/4" through 1-1/2" combination nipples for easier installation.

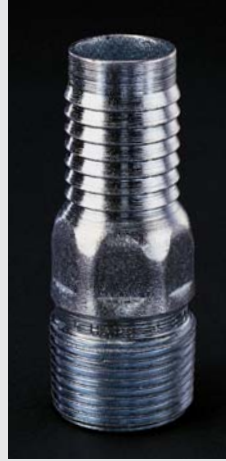

Recommended Hose Attachment

- Sleeves (Section G)
- Preformed Bands (Section I)

Recommended Use

- Liquid, bulk handling, low-pressure air

SUCTION HOSE COUPLINGS

Features & Benefits


- Maximum number of serrations for maximum holding power.
- Long lead serration for easier hose insertion.
- Suction Couplings machined from pipe eliminate porosity and parting lines, improving sealing and retention.

Recommended Hose Attachment

- Sleeves (Section G)
- Preformed Bands (Section I)

Recommended Use

- Liquid, bulk handling



Manufacturing Suction Hose Couplings from pipe eliminates wide, flat mating surfaces at the male and female halves.

BALL & SOCKET COUPLINGS

Features & Benefits

- Proven, Campbell-style machined hose shank is designed for crimping (crimp specs available).
- Shank design dramatically improves sealing and retention, cuts installation time in half.
- Hose shanks are welded to ball & socket ball ends.

Recommended Hose Attachment

- Sleeves (Section G)

Recommended Use

- Water Suction/Discharge
- Sewage bypass



Bauer-style vs. Campbell Ball & Socket

MAX. SYSTEM WORKING PRESSURE (PSI @ 70°F) SEE NOTE 1

Hose System Components			Hose Size										
Fitting/Coupling	Attachment	Hose Type ²	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6	8
Combination Nipple	Short Sleeve	Rubber	400	350	300	275	250	225	210	200	175	150	100
Combination Nipple	Short Sleeve	Chemical	200	200	200	140	130	120	110	100	50	–	–
Combination Nipple	Short Sleeve	PVC	150	125	100	90	85	65	60	55	40	30	20
Suction Coupling	Short Sleeve	Rubber	–	–	–	275	250	225	210	200	175	150	100
Suction Coupling	Short Sleeve	PVC	–	–	–	90	85	65	60	55	40	–	–
Ball & Socket Coupling	Sleeve	Rubber	–	–	–	–	–	300*	–	250*	225*	140*	60*
Ball & Socket Coupling	Sleeve	PVC	–	–	–	–	–	170*	–	140*	100*	80*	50*

See footnotes 1, 2, 3 and 6 on Page 1.

*Ball & Socket safety factor is 1.5 x working pressure.

NH SUCTION HOSE COUPLINGS (NST threads)



COMPLETE SET (NH)



Shanks: Plated Steel

Nut: Brass

hose size	part number	list each
1-1/2	NHS-6	48.47
2-1/2	NHS-10	92.52

Shanks: Brass

Nut: Brass

1-1/2	NHB-6	76.37
2-1/2	NHB-10	154.47

FEMALE SHANK (NH)



Shanks: Plated Steel

Nut: Brass

hose size	part number	list each
1-1/2	FHS-6	28.64
2-1/2	FHS-10	58.74

Shanks: Brass

Nut: Brass

1-1/2	FHB-6	34.71
2-1/2	FHB-10	72.89

MALE SHANK (NH)



Plated Steel

hose size	part number	list each
1-1/2	MHS-6	19.82
2-1/2	MHS-10	33.78

Brass

1-1/2	MHB-6	41.65
2-1/2	MHB-10	81.57

WASHER



Neoprene (NPSM)

hose size	part number	list each
1-1/4	WN-5	0.66
1-1/2	WN-6	0.66
2	WN-8	0.72
2-1/2	WN-10	0.86
3	WN-12	1.35
4	WN-16	1.68
6	WN-24	6.80
8	WN-32	14.72

Teflon® (NPSM)

1-1/2	WT-6	12.71
2	WT-8	14.98
3	WT-12	20.60

Neoprene (NH)

1-1/2	NHW-6	2.89
2-1/2	NHW-10	2.89

SPANNER WRENCH



size	part number	list each
1-1/2	SW-6	8.43
2	SW-8	8.43
3	SW-12	10.09
4	SW-16	10.09
6	SW-32	50.44
8	SW-32	50.44

ADJUSTABLE HYDRANT WRENCH



part number	list each
AHW-1	48.33

- Adjustable for 1-1/4" square nuts and pentagon hydrant nuts up to 1-3/4" point to flat.
- Spanner hook for 1-1/2" through 6" pin lug nuts.
- 18" overall length.
- Sold in 5 per carton quantity.

FOOT VALVES & STRAINERS



ROUND HOLE STEEL STRAINER



npsm size	part number	list each
1-1/2	RHS-6	15.99
2	RHS-8	18.25
2-1/2	RHS-10	22.98
3	RHS-12	29.36
4	RHS-16	40.85
6	RHS-24	114.86
8	RHS-32	268.02

SQUARE HOLE STEEL STRAINER



npsm size	part number	list each
1-1/2	SHS-6	17.75
2	SHS-8	20.25
2-1/2	SHS-10	25.52
3	SHS-12	32.62
4	SHS-16	45.39
6	SHS-24	127.64

TOP HOLE STEEL STRAINER



npsm size	part number	list each
1-1/2	THS-6	56.44
2	THS-8	63.14
3	THS-12	142.63

BOTTOM HOLE STEEL STRAINER



npsm size	part number	list each
1-1/2	BHS-6	60.78
2	BHS-8	68.92
3	BHS-12	154.34

FOOT VALVE (painted cast iron)



npt size	part number	list each
1-1/2	FV-6	24.68
2	FV-8	38.43
2-1/2	FV-10	52.73
3	FV-12	65.64
4	FV-16	109.12
6	FV-24	269.28
8	FV-32	561.00

Foot Valve components are available upon request.