


CampbellCrimpnology™ offers crimping flexibility for your multi-purpose hose applications.



Manufacturing Suction Hose Couplings from pipe eliminates wide, flat, mating surfaces at the male and female halves

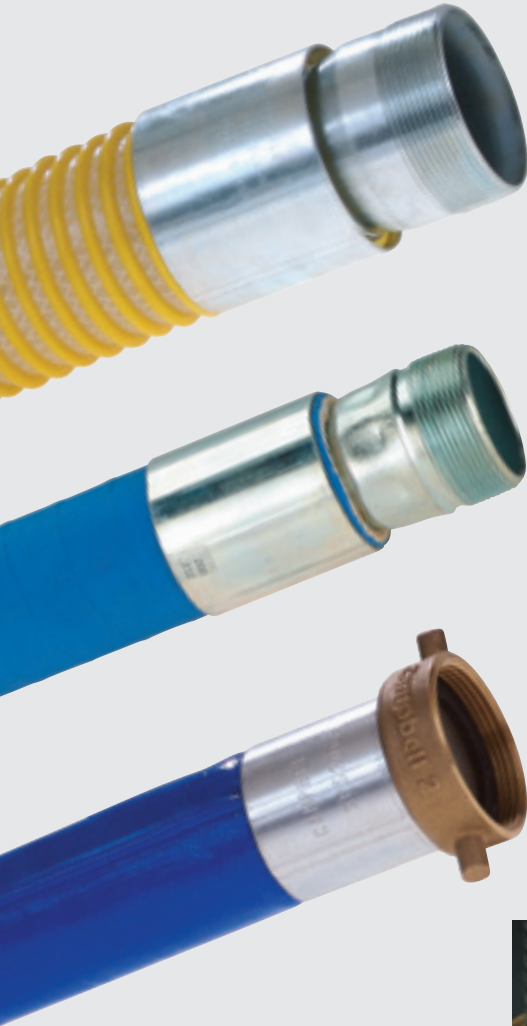

COMBINATION NIPPLES AND MENDERS

Features & Benefits


- Maximum number of serrations for maximum holding power.
- Long lead serration for easier hose insertion.
- Formed hex wrench area on 3/4" through 1-1/2" combination nipples for easier installation.

Recommended Hose Attachment

- Sleeves (Section G)
- Preformed Bands (Section I)

Recommended Use

- Multi-purpose liquid, bulk handling, low-pressure air

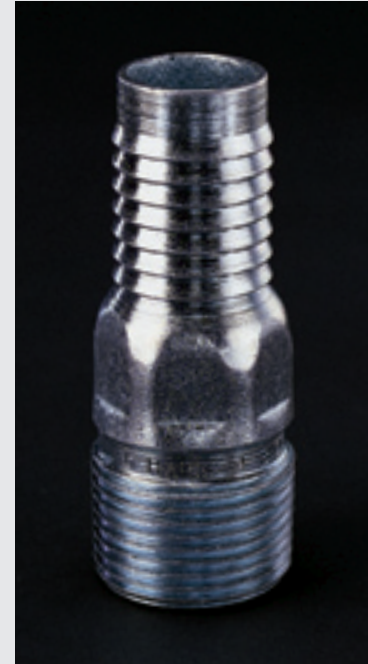

Combination Nipple

SUCTION HOSE COUPLINGS

Features & Benefits

- Maximum number of serrations for maximum holding power.
- Long lead serration for easier hose insertion.
- Suction Couplings machined from pipe eliminate porosity and parting lines, improving sealing and retention.

Recommended Hose Attachment

- Sleeves (Section G)
- Preformed Bands (Section I)

Recommended Use

- Multi-purpose liquid, bulk handling, low-pressure air

TOE NIPPLES

Features & Benefits

- Thread One End Nipples for welding to metal hose are available in carbon steel and 304 stainless steel.
- Weld-on is machined for easier, more efficient welding.

FOOT VALVES AND STEEL STRAINERS

Features & Benefits

- Campbell Foot Valves are built for durability in abusive construction and de-watering applications.
- Steel Strainers are available with standard round holes or larger square holes for increased suction capacity.

MAX. SYSTEM WORKING PRESSURE (PSI @ 70°F) SEE NOTE 1

Hose System Components			MAX. SYSTEM WORKING PRESSURE (PSI @ 70°F) SEE NOTE 1										
Fitting/Coupling	Attachment	Hose Type ²	Hose Size										
			1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6	8
Combination Nipple	Short Sleeve	Rubber	400	350	300	275	250	225	210	200	175	150	100
Combination Nipple	Short Sleeve	PVC	150	125	100	90	85	65	60	55	40	-	-
Suction Coupling	Short Sleeve	Rubber	-	-	-	275	250	225	210	200	175	150	100
Suction Coupling	Short Sleeve	PVC	-	-	-	90	85	65	60	55	40	-	-

See footnotes 1 and 2 on Page 1

SUCTION HOSE COUPLINGS



COMPLETE SET



Shanks: Plated Steel Nut: Brass

hose size	part number	list each
1-1/4	CSB-5	39.57
1-1/2	CSB-6	27.76
2	CSB-8	36.19
2-1/2	CSB-10	51.82
3	CSB-12	61.52
4	CSB-16	99.04
6	CSB-24	205.25
8	CSB-32	686.30

Shanks: Plated Steel Nut: Ductile Iron

1-1/2	CSD-6	27.59
2	CSD-8	37.07
2-1/2	CSD-10	54.08
3	CSD-12	63.10
4	CSD-16	100.55
6	CSD-24	217.03

Shanks: Brass

Nut: Brass

1-1/4	CBB-5	47.63
1-1/2	CBB-6	42.97
2	CBB-8	57.02
2-1/2	CBB-10	98.01
3	CBB-12	146.14
4	CBB-16	247.70

Shanks: 316 Stainless Nut: 316 Stainless

1-1/2	CSS-6	133.40
2	CSS-8	181.47
3	CSS-12	313.32

FEMALE SHANK



Shank: Plated Steel Nut: Brass

hose size	part number	list each
1-1/4	FSB-5	23.71
1-1/2	FSB-6	16.09
2	FSB-8	18.41
2-1/2	FSB-10	26.62
3	FSB-12	34.16
4	FSB-16	59.09
6	FSB-24	116.66
8	FSB-32	538.69

Shank: Plated Steel Nut: Ductile Iron

1-1/2	FSD-6	15.86
2	FSD-8	19.22
2-1/2	FSD-10	28.88
3	FSD-12	35.79
4	FSD-16	60.59
6	FSD-24	128.50

Shank: Brass

Nut: Brass

1-1/4	FBB-5	29.22
1-1/2	FBB-6	25.33
2	FBB-8	34.76
2-1/2	FBB-10	62.37
3	FBB-12	82.34
4	FBB-16	141.33

Shank: 316 Stainless Nut: 316 Stainless

1-1/2	FSS-6	105.47
2	FSS-8	141.14
3	FSS-12	201.64

MALE SHANK



Plated Steel

hose size	part number	list each
1-1/4	MS-5	15.42
1-1/2	MS-6	11.42
2	MS-8	17.34
2-1/2	MS-10	24.52
3	MS-12	26.61
4	MS-16	38.86
6	MS-24	86.15
8	MS-32	143.55

Brass

1-1/4	MB-5	18.40
1-1/2	MB-6	17.75
2	MB-8	21.39
2-1/2	MB-10	44.56
3	MB-12	63.45
4	MB-16	106.49

316 Stainless Steel

1-1/2	MSS-6	27.92
2	MSS-8	40.33
3	MSS-12	111.68

FEMALE LONG SHANK



Shank: Plated Steel Nut: Brass

hose size	part number	list each
1-1/2	LSB-6	39.41
2	LSB-8	45.97
2-1/2	LSB-10	74.82
3	LSB-12	69.30
4	LSB-16	109.43

Shank: Brass

Nut: Brass

1-1/2	LBB-6	51.11
2	LBB-8	63.44
2-1/2	LBB-10	96.03
3	LBB-12	135.68
4	LBB-16	222.02

Shank: 316 Stainless

Nut: 316 Stainless (includes Teflon Washer)

1-1/2	LSS-6	124.09
2	LSS-8	155.11
3	LSS-12	209.39

FEMALE LONG SHANK (hex nut)



Shank: Brass

Hex Nut: Brass

hose size	part number	list each
1-1/2	XLFB-6	80.19
2	XLFB-8	92.67
2-1/2	XLFB-10	124.76
3	XLFB-12	176.42
4	XLFB-16	338.60

MALE LONG SHANK



Plated Steel

hose size	part number	list each
1-1/2	LMS-6	18.91
2	LMS-8	23.64
2-1/2	LMS-10	39.41
3	LMS-12	39.02
4	LMS-16	59.90

Brass

1-1/2	LMB-6	37.43
2	LMB-8	55.24
2-1/2	LMB-10	80.19
3	LMB-12	123.87
4	LMB-16	290.04

316 Stainless

1-1/2	LMSS-6	54.28
2	LMSS-8	79.10
3	LMSS-12	144.25