


# 8" CRIMPNOLOGY™ NIPPLES & FERRULES

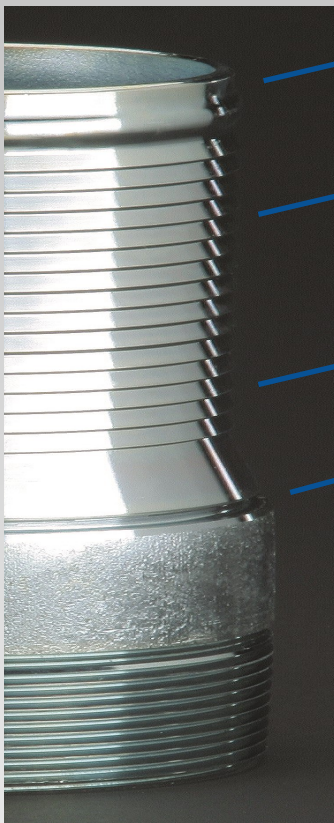

Smooth End Detail

Rounder Serrations

Sharper Serrations

Interlock Groove

- Designed for use with Campbell interlocking ferrules.
- Interlock groove on fitting locks ferrule into place for the ultimate in holding power.
- Graduated serration pattern (sharper near the interlock, rounder near the end, with smooth end detail to reduce potential failure caused by abrasion) grips, seals, and protects hose.
- Shank and ferrule lengths are matched for performance and to avoid potential hose, tube, or cover damage.
- Crimped assemblies are low profile and eliminate sharp edges from clamp buckles.
- Crimp procedures and specs are available in the Campbell Crimp Chart and Crimp App.


Available in these configurations:



Threaded  
HAPS-32C



Turnback  
THAS-32C



Flanged  
FHAS-32C



Ferrule  
FPS800xxx

MAXIMUM SYSTEM WORKING PRESSURE (PSI. @ 70°F)												
Hose System Components			Hose Size									
Fitting/Coupling	Attachment	Hose Type	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	6	8
Crimpnology Nipple	Ferrule	Chem/Rubber	-	500	350	325	300	275	250	250	225	175
Crimpnology Nipple	Ferrule	Soft	-	200	175	150	150	125	100	75	50	20
Crimpnology Swivel	Ferrule	Chem/Rubber	400	500	-	-	-	-	-	-	-	-
Long Crimpnology Swivel	Long Ferrule	Chem/Rubber	-	-	500	1000	1000	-	-	-	-	-
Long Crimpnology Nipple	Long Ferrule	Rubber	-	-	-	1000	1000	650	600	500	-	-
Crimpnology Flange (steel)	Ferrule	Chem/Rubber	-	-	-	285	285	275	250	250	225	175
Crimpnology Flange (ss)	Ferrule	Chem/Rubber	-	-	-	230	230	230	230	230	225	-



# Campbell Fittings

THE LEADER IN HOSE SYSTEMS TECHNOLOGY

301 S. Washington Street, Boyertown, PA 19512, USA

800-367-3678, [www.CampbellFittings.com](http://www.CampbellFittings.com)